





Mind-blowing oil flow for torque tools.

Panther Hydraulic Powerpack

Panther Hydraulic Powerpack

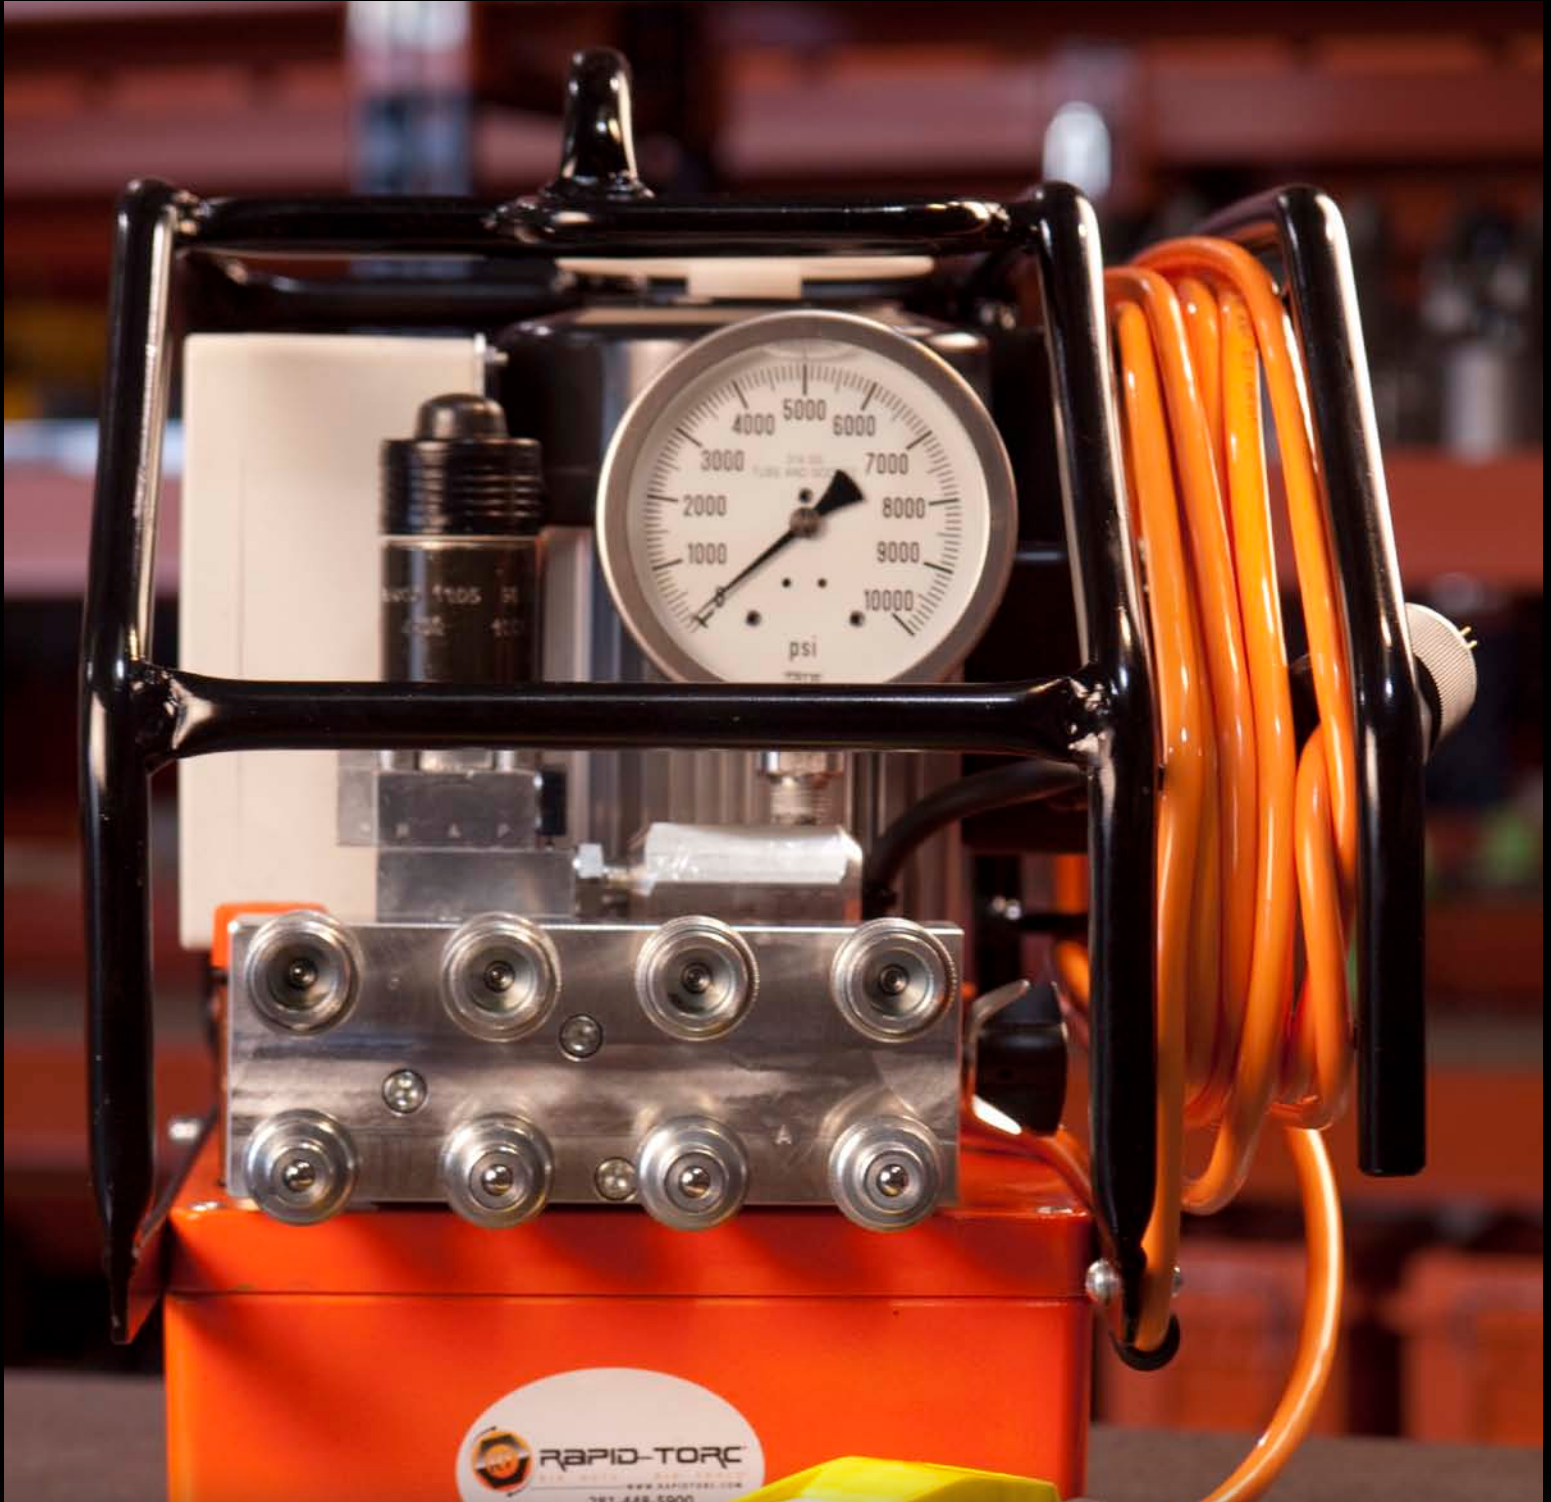


The gauge features class 1 accuracy, safety glass, dual-scale and is calibrated according to ISO 17025.

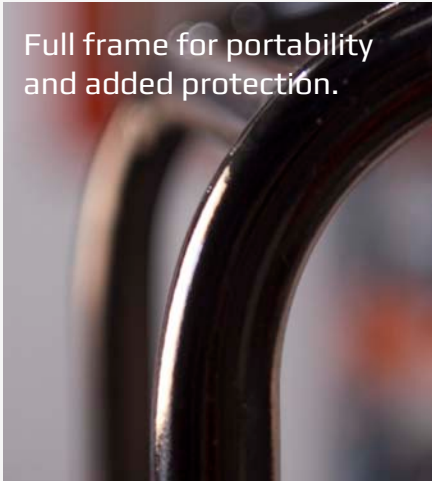

Full frame for portability and added protection.



Four-port manifold. Teams can work with up to 4 tools at a time, drastically increasing productivity.

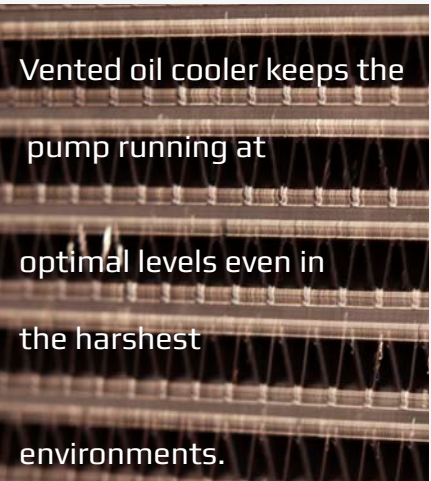

Vented oil cooler keeps the pump running at optimal levels even in the harshest environments.



Long run, high pressure regulating valve.



Panther Air Driven Features

- 700 bar/10,000 psi double effect pump
- Quiet operation (-80dB)
- Multi-stage hydraulic piston pumps
- Exceptional design is rated IP54
- Reaches 700bar/10kpsi with just 50 psi air (air-driven models)
- 24V Remote control with 4.5m/15ft cable



Panther Electric Pump Features

- 700 bar/10,000 psi double effect pump
- Quiet operation (-80dB)
- Multi-stage hydraulic piston pumps
- Exceptional design is rated IP54
- Auto-shutoff after idling 1 minute (electric models)
- 24V Remote control with 4.5m/15ft cable

			Electric (110V or 220V)			Air driven		
Model			Panther 025	Panther 055	Panther 150	Panther A110	Panther A380	Cougar 734
Oil Flow	1250 psi		195 cu. in/min	391 cu. in/min	641 cu. in/min	275 cu.in/min	701 cu. in/min	734 cu. in/min
	70 bar		3.2 l/min	6.4 l/min	10.5 l/min	4.5 l/min	11.5 l/min	12 l/min
	3600 psi		54 cu. in/min	110 cu. in/min	153 cu. in/min	67 cu in./min	213 cu. in/min	196 cu.in/min
	250 bar		0.9l/min	1.8 l/min	2.5 l/min	1.1 l/min	3.5 l/min	3.2 l/min
	10000 psi		21 cu. in/min	42 cu. in/min	92 cu. in/min	24 cu. in/min	79 cu.in/min	86 cu.in/min
	700 bar		0.35 l/min	0.7 l/min	1.5 l/min	0.4 l/min	1.3 l/min	1.4 l/min
Intercooler System			No	Yes	Yes	Yes	Yes	Yes
Source			110V or 220V	110V or 220V	110V or 220V	7 bar/100 psi	7 bar/100 psi	7 bar/100 psi
Weight			33 lbs	48 lbs	72 lbs	37 lbs	46 lbs	72 lbs
			15 kg	22 kg	33 kg	17 kg	21 kg	33 kg
Oil Capacity	Gallon		0.5	1	1.5	0.5	1.5	1.5
	Liter		1.89	3.78	5.67	1.89	5.67	5.67
Dimension	L	in	12.6”	17.3”	20.1”	13.4”	15.7”	15.7”
		mm	320.0	439.4	510.5	340.3	398.7	398.7
	W	in	8.3”	9.4”	15.7”	13.7”	14.9”	14.9”
		mm	210.8	238.7	398.7	347.9	378.4	378.4
	H	in	15.3”	18.5”	23.2”	16.5”	18.1”	18.1”
		mm	388.6	469.9	589.2	419.1	459.7	459.7
Number of ports			1	4	4	1	4	4
Full frame			No	Yes	Yes	No	Yes	Yes

ACCESSORIES

Flat face/quick connect couplers



Order standard hoses 15ft/4.5m through 72ft/20m



Calibrated MPA or Bar/PSI gauges



10,000 PSI **PANTHER**

RT

Ra

B I G N

Rapid-Torc is dedicated to having the most comprehensive torquing solutions available.

US Headquarters

Rapid-Torc, Inc
Phone: (281)448-5900
Fax: (281)260-0779
2406 E Pasadena Fwy
Pasadena, TX 77506
USA

European Headquarters

Rapid-Torc SA
Phone: +32 2 358 1933
Fax: +32 2 358 5066
Av Louise, 306
B-1050 Brussel
Belgium

www.rapidtorc.com
sales@rapidtorc.com

